



FOUNDATION Fieldbus Input/Relay Output Modules

- 461087 - (Interlocked Outputs, Flat mount)**
- 461088 - (Independent Outputs, Flat mount)**
- 465022 - (Interlocked Outputs, DIN rail mount);**
- 465023 - (Independent Outputs, DIN rail mount)**

These I/O Modules are designed to function as FOUNDATION Fieldbus nodes with termination points for connecting switches/sensors (discrete and analog), as well as relay outputs to operate devices such as motors and other high power devices. Relay Outputs can be either Interlocked to operate AC motors or, Independent to operate separate AC loads. Outputs can be configured to "Fail On" or "Fail Off".

Inputs and Outputs

- Two (2) Discrete Inputs
- Two (2) Discrete (Relay) Outputs
- One (1) Analog Input (4-20mA)
- One (1) Analog Output (4-20mA)



Features

- Date of Last Service
- Pre-determined output Fail State

(See Pages 2&3 for specifications and detailed wiring instructions)



Input/Relay Output Module Dimensions (in mm)

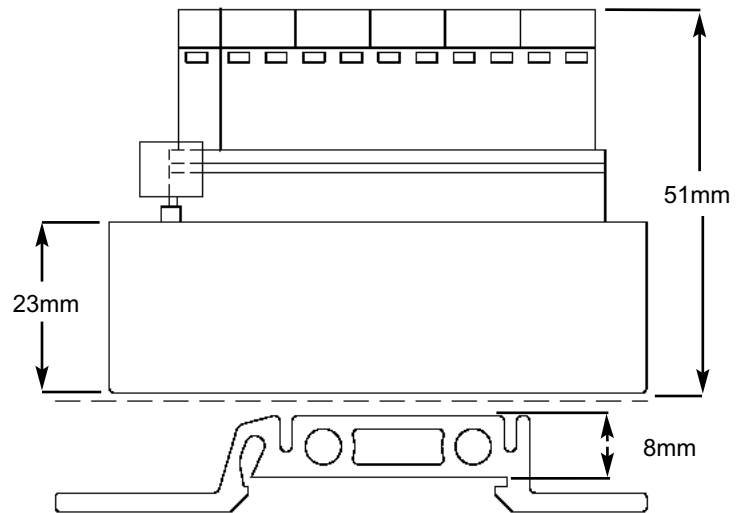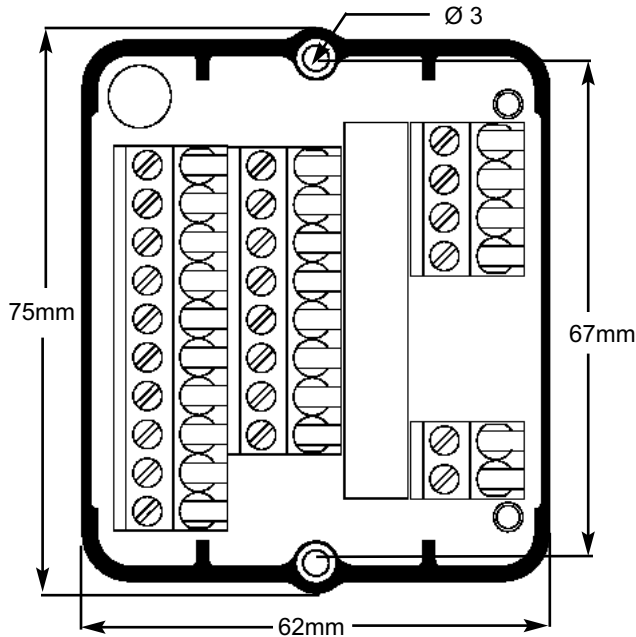

StoneL Corporation
One StoneL Dr
26271 US Hwy 59
Fergus Falls, MN 56537
USA

Telephone: 218.739.5774
 Toll Free: 800.843.7866
 Fax: 218.739.5776
 E-mail: sales@stonel.com
 Website: www.stonel.com

© 2001 StoneL Corporation

Specifications

| | |
|-----------------------------------|---|
| Operating Voltage | 9-32 VDC via Foundation Fieldbus voltage |
| Bus Current Draw | 16mA |
| External Control Voltage | 24 VDC (For Analog I/O and Relay Output control) |
| External Control Max Current | Analog Input - 25mA Analog Output - 25mA Relay Output coils - 21mA each (2) |
| Discrete Inputs | (2) For low power dry contact switches capable of operating at <.045mA @ 6.5VDC or solid state PNP capable of operating at <1mA @ 6.5 VDC |
| Discrete Controlled Relay Outputs | (2) Discrete Controlled Relay Outputs with contacts rated for 120/250VAC/30VDC fused @ 2 amps |
| Analog Input | (1) Analog input (4-20 mA). 10 bit resolution (0.1%) |
| Analog Output | (1) Analog output (4-20 mA). 10 bit resolution (0.1%) |
| Function Blocks | 2 DI; 2 DO; 1 AI; 1AO |
| Indication | Input 1 = Red LED Input 2 = Green LED |

Standard Channel Assignments

| | |
|---|---|
| Channel 1 (DI1) - Discrete Input 1 (Red LED); | 1 = True; 0 = False |
| Channel 2 (DI2) - Discrete Input 2 (Green LED); | 1 = True; 0 = False |
| Channel 3 (DO1) - Discrete Output 1 (OUT 1); | 1 = True; 0 = False |
| Channel 4 (DO2) - Discrete Output 2 (OUT 2); | 1 = True; 0 = False |
| Channel 5 (AI1) - Analog Input (AIN); | % of 4-20mA Input Range (0 = 4mA; 100 = 20mA) |
| Channel 6 (AO1) - Analog Output (AOUT); | % of 4-20mA Input Range (0 = 4mA; 100 = 20mA) |


Special Channel Assignments

| |
|--|
| Channel 7 (AO1) - Analog Output (AOUT) with state report from Analog Input (READBACK_D) |
| Channel 8 (DO1) - Discrete Output 1 (OUT 1) with state report from Discrete Input 1 (READBACK_D) |
| Channel 9 (DO2) - Discrete Output 2 (OUT 2) with state report from Discrete Input 2 (READBACK_D) |

Valve Control Single Block Mode

Channel 10 (DO1) - Discrete Output 1 (OUT 1) with state report Discrete Inputs 1&2 (READBACK_D):
READBACK_D Values:

- 0 = None
- 1 = Discrete Input 1 is True
- 2 = Discrete Input 2 is True
- 3 = Both Discrete Inputs 1&2 are True

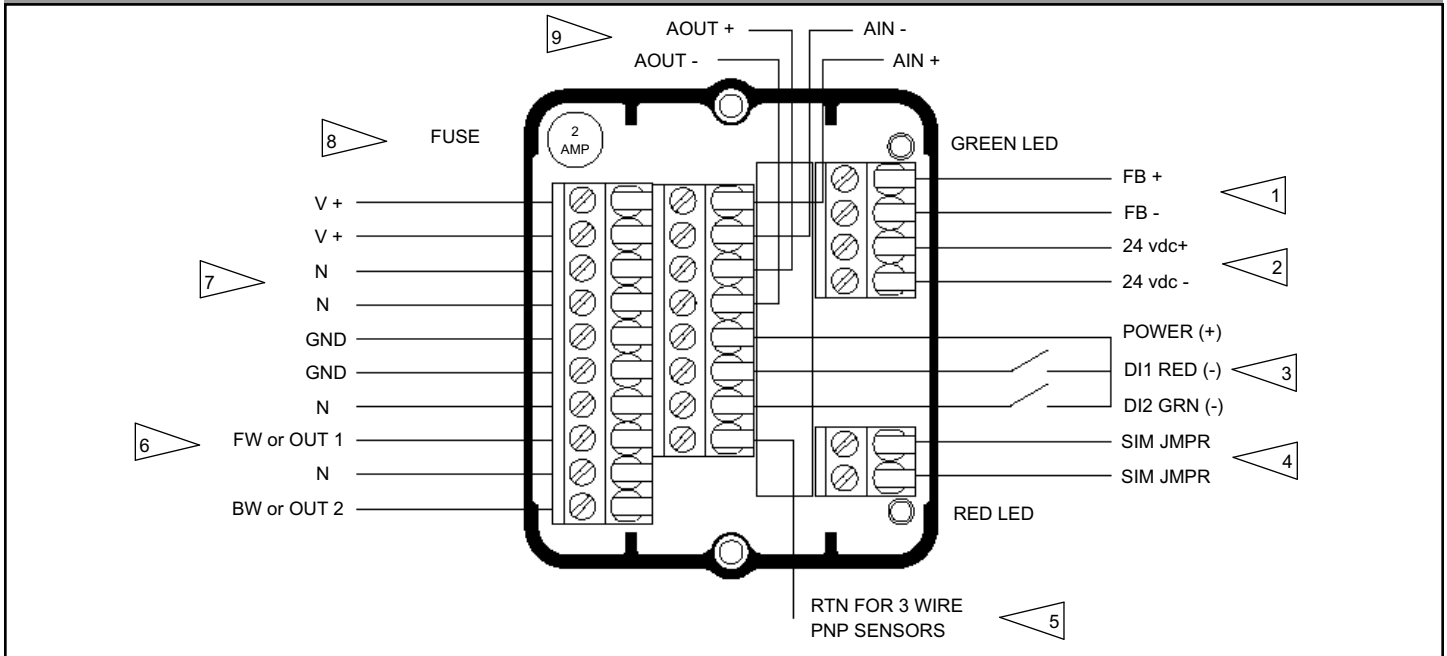

INSTALLATION NOTES:

1. FOUNDATION Fieldbus bus communications connection points.
2. Connection points for external 24VDC power for Analog I/O and internal relay coils for Relay Output.
3. Bus powered Discrete Input connection points for low power dry contacts capable of operating at $<.045\text{mA @ }6.5\text{VDC}$ or solid state PNP sensors capable of operating at $<1\text{mA}$ and 6.5VDC . Red LED is local indication of discrete input DI1 RED on/off status and the Green LED for DI2 GRN on/off status.
4. These connection points not used by the consumer.
5. Connection point for the "return" of 3 wire PNP sensors. (See Note 3)
6. Connection points for devices to be controlled by the Relay Outputs. OUT1 and OUT2 are markings found on modules with independent outputs (461088, 465023). BW And FW markings are used on modules with interlocked outputs (461087, 465022). Modules with interlocked outputs are typically used with AC motors. BW and FW represent forward and reverse operation of the motor. 24VDC must be applied (See Note 2)
7. Connection points for external 120/250VAC or 30VDC power for devices connected to the Relay Outputs. V+, V+, N, N, GND, GND are redundant termination points. The external power source feeds both Relay Outputs
8. 2 amp replaceable fuse (Part# 434162) for Relay Output protection. (See Note 6)
9. Connection points for 2 wire, 24VDC, 4-20mA analog devices. (See Note 2)