

**Input/Output Modules**

**StoneL Model 461052, 465014 (DIN)**

**Input/Bus Powered Output Module**


This I/O module is designed to function as a Foundation Fieldbus node with termination points for connecting switches/sensors as well as output devices such as solenoid valves and relays. Outputs can be configured to fail on or off.

**Inputs and Outputs**

- Two (2) Discrete inputs
- Two (2) Discrete outputs

**Features**

- Pre-determined output fail state

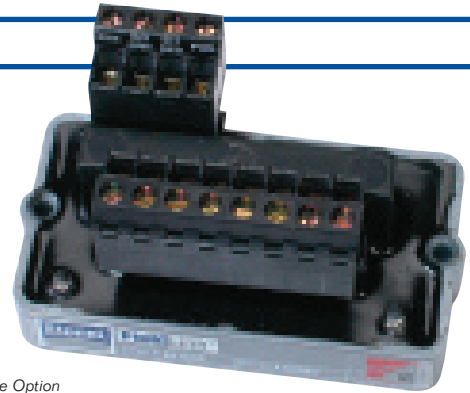



Enclosure Option



**Specifications**

Model Numbers	• 461052, 465014 (DIN)
Inputs	• (2) 6.5 VDC <.045mA, must be low power dry contact or solid state pnp capable of operating at 6.5 VDC and <1 mA.
Outputs	• (2) 6.5 VDC 2mA. Suitable for StoneL Piezo Valve
Operating Voltage	• 9 to 32 VDC via Foundation Fieldbus voltage
Indication	• (2) LEDs indicate discrete input status (Red/Green)
Approvals	• cFMus Approved Class 1 Div 2 (NI) • cFMus Approved Class 1 Div 1 (IS) (FISCO) (Entity)
Dimensions	• 75mm, 43mm, 42mm (L, W, H)
Operating Temp.	• -40° to +85°C (-40° to +185°F)

**Dimensions (in mm)**

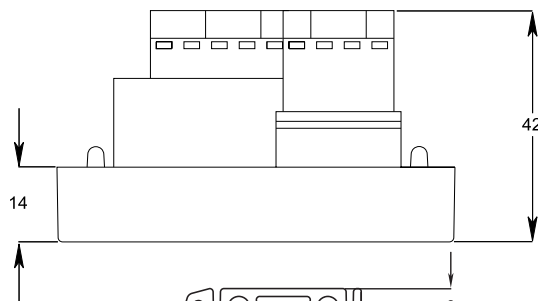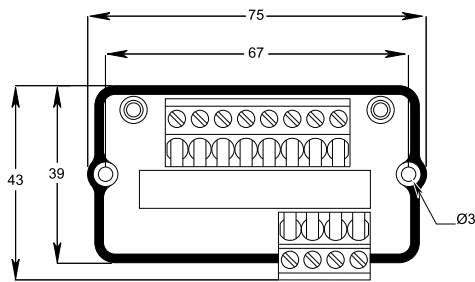

Available with DIN Rail Clip. Specify model # 465014

**Wiring Diagram**

