

## Drop Connectors


### StoneL Model 461056, 465004 (DIN)

#### Passive Multi-drop Connector (2 Drops)

This Multi-drop Connector is compact with direct mount for wiring Modbus networks. It provides terminations for Bus In, Bus Out, and two (2) individual drops or spurs.

#### Features

- Direct mount or DIN rail mount available
- IP20 housing

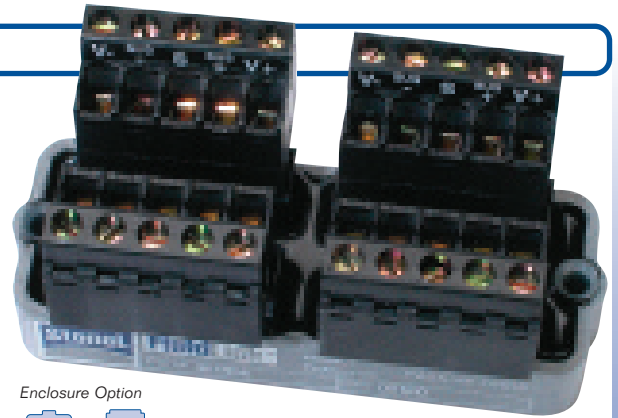



Enclosure Option




#### Specifications

Model Numbers	• 461056, 465004 (DIN)
Protocol	• Modbus RS485 with 24 VDC power
Max Spurs (Drops)	• 2
Type	• Passive drops
Max Current	• 8 Amp
Voltage Drop, Bus Trunk	• Negligible
Voltage Drop, Spur	• Negligible
Maximum Voltage	• 35VDC
Current Consumption	• None
Operating Temp.	• -40° to +85°C (-40° to +185°F)
Storage Temp.	• -40° to +85°C (-40° to +185°F)
Housing	• Engineered resin
Housing Dimensions	• 75mm, 26mm, 39mm (L, W, H)

#### Dimensions (in mm)

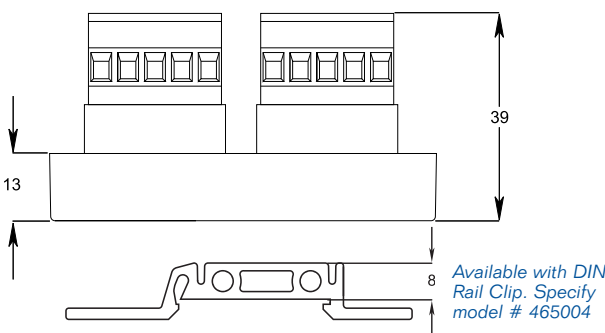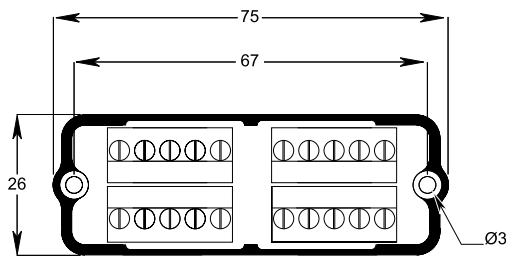

#### Schematic Drawing

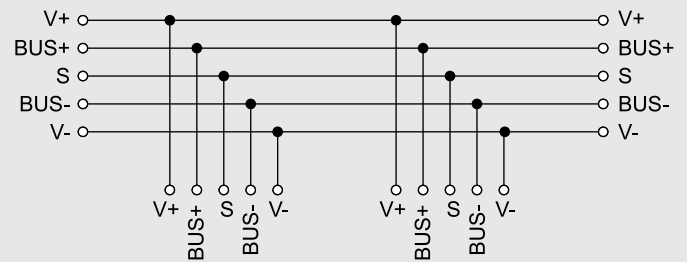

#### Wiring Diagram

