

Drop Connectors

StoneL Model 461077

Passive Multi-drop Connector (4 Drops)

This Multi-drop Connector is compact with DIN rail mount for wiring DeviceNet networks. This device provides terminations for Bus In, Bus Out, and four (4) individual drops or spurs.

Features

- DeviceNet power status LED
- DIN rail mounting
- IP20 housing




Enclosure Option




Specifications

Protocol	• DeviceNet
Max Spurs (Drops)	• 4
Type	• Passive drops
Bus Trunk Max Current/Drops	• 8 Amps
Voltage Drop, Bus Trunk	• Negligible
Voltage Drop, Spur	• Negligible
Max Voltage	• 35 VDC
Current Consumption	• 2 mA
Displays	• DeviceNet power status, green LED
Operating Temp.	• -40° to +85°C (-40° to +185°F)
Storage Temp.	• -40° to +85°C (-40° to +185°F)
Housing	• Engineered Resin, DIN rail mounting
Housing Dimensions	• 113mm, 47mm, 68mm (L, W, H)
Ingress Protection	• IP20

Dimensions (in mm)

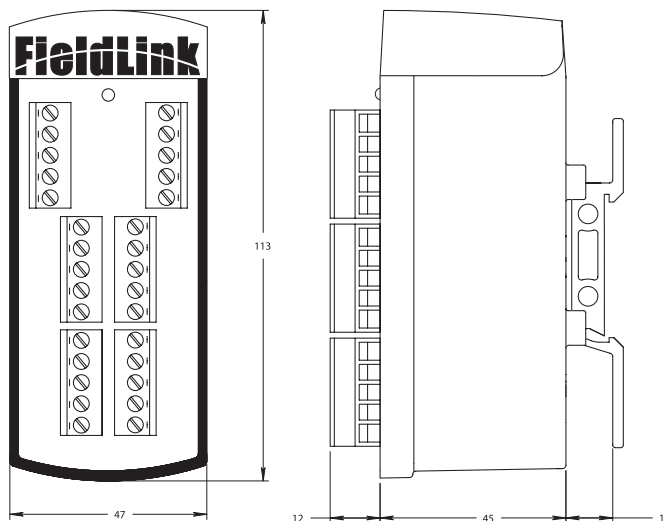

Schematic Drawing

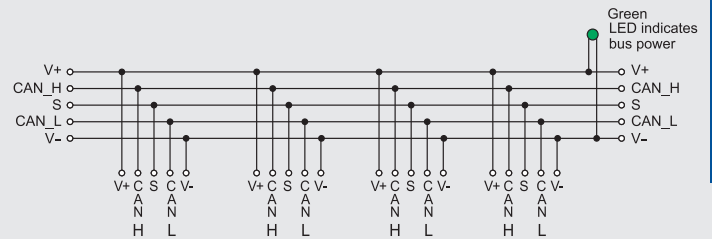

Wiring Diagram

