

Drop connectors

Model number

DR461056A

DR465004A (DIN)


Passive multi-drop connector (2 drops)

This multi-drop connector is compact with direct mount for wiring Profibus-DP/Modbus networks. It provides terminations for bus in, bus out, and two (2) individual drops or spurs.

Features

- Direct mount or DIN rail mount available
- IP20 housing


PROFIBUS

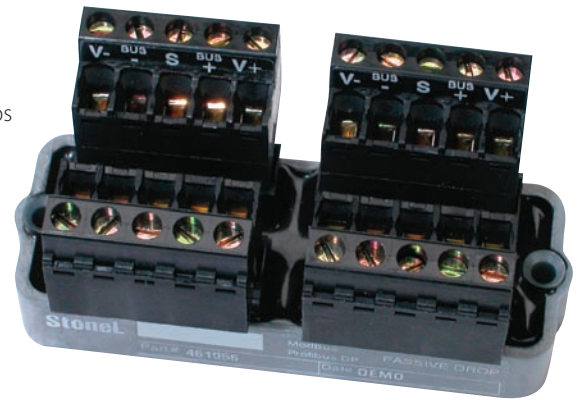


Specifications	
Protocol	Profibus-DP
Maximum voltage	35 VDC
Maximum current (trunk)	8 amps
Voltage drop (trunk)	Negligible
Voltage drop (drop)	Negligible
Trip current (drop)	No trip current
Maximum devices per drop	No limit
Current consumption	None
Dimensions (L, W, H)	75mm, 26mm, 40mm
Housing	Engineered resin
Operating temperature	-40° to +80°C (-40° to +176°F)



Dimensions (mm)

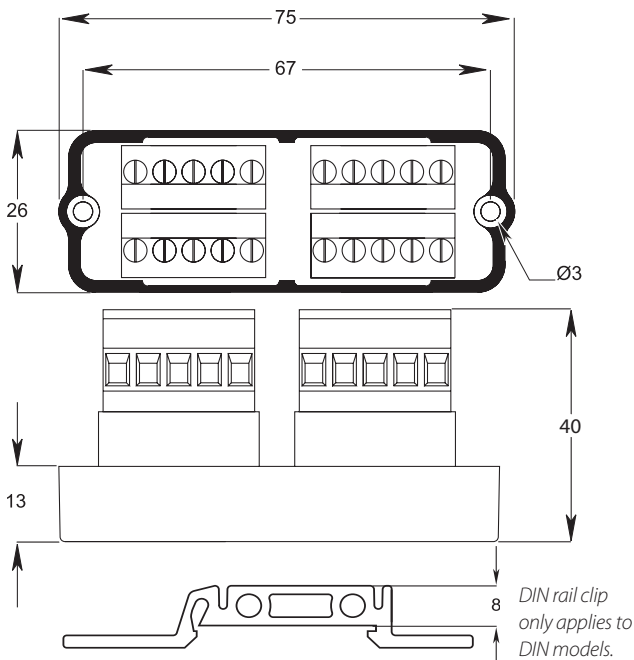

Schematic drawing

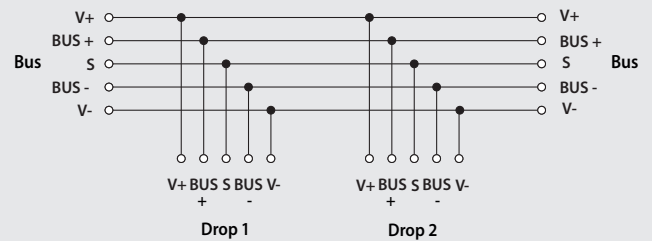

Wiring diagram

