

Masters and gateways

Model number
GW458154A



Dual channel AS-Interface to Ethernet (EtherNet/IP and Modbus TCP) gateway

This dual channel AS-Interface/Ethernet gateway interfaces two AS-Interface networks to the Ethernet network. The gateway acts as a master for the AS-Interface network and as a node on the Ethernet network.


Features

- Gateway works with Ethernet/IP and Modbus/TCP
- Integrated Ethernet switch
- Version 3.0 master
- Serial diagnostics port: See SW462008A for cable and software
- Duplicate address detection



Specifications	
AS-Interface master version	3.0
Interface	RJ45 10/100 MBaud Ethernet, integrated switch RS232 diagnostic interface
Operating current	200mA from AS-i Channel 1 70mA from AS-i Channel 2
Operating voltage	30VDC AS-Interface voltage
Baud rate	10/100 MBaud
AS-Interface cycle time	150 microsec x (AS-i slaves +2)
Displays	LCD display AS-i channel 1/2, green LED Ethernet active, green LED Config error, red LED Voltage ok, green LED AS-i ok, green LED Auto address enabled, green LED Config mode, yellow LED
Operating temperature	0° to 55°C (32° to 131°F)
Dimensions (L,W,H)	120mm, 85mm, 83mm
Ingress protection	IP20, field enclosure required
Weight	500g

Schematic drawing

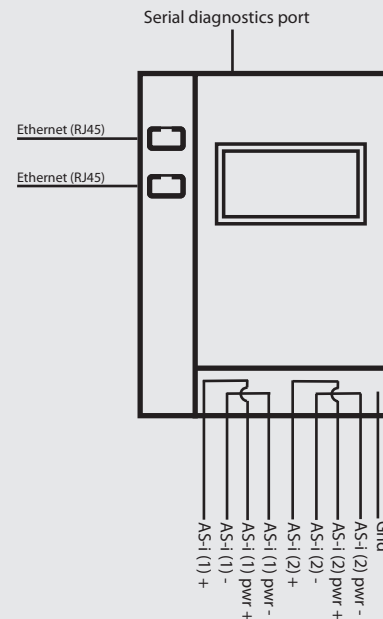

Graphical display

The interactive graphical display on this gateway enables the entire AS-Interface network to be commissioned and the connected devices to be completely tested without a PC, PLC or host system. It also enables the user to complete all tasks previously requiring the "AS-Interface Control Tools" software package or hand-held. This allows for simpler and faster commissioning.

Features

- Set device addresses
- Test inputs and outputs
- Perform network diagnostics
- View error counter